Intensifiers 50, 80, 160 HP 60,000 PSI Operation



Automatic
Material
Height
Tracking



Dealer Information:



Programming:

Control based or stand-alone post to process:

DXF, RASTER, DWG, HPGL, PDF, UCD, CNC, UJC, XML&IJS

Maximum Mechanical Backlash:

0.002 inch (0.051mm) Bi-Directional

X-Y Dynamic Positioning Accuracy:

+/-0.005 inch(0.127mm) up to 156X156 inches (3962 to 3962mm) X-Y Travel

Control Minimum Resolution Distance:


0.00003 inch (0.0079mm)

Z-Axis Travel: 6 to 36 inches (150mm to 915mm)

DACC Industries

5235 Adams Avenue, Baton Rouge, LA 70806 888-335-DACC(3222) - email: sales@dacc.com www.DACC.com

Accusor et

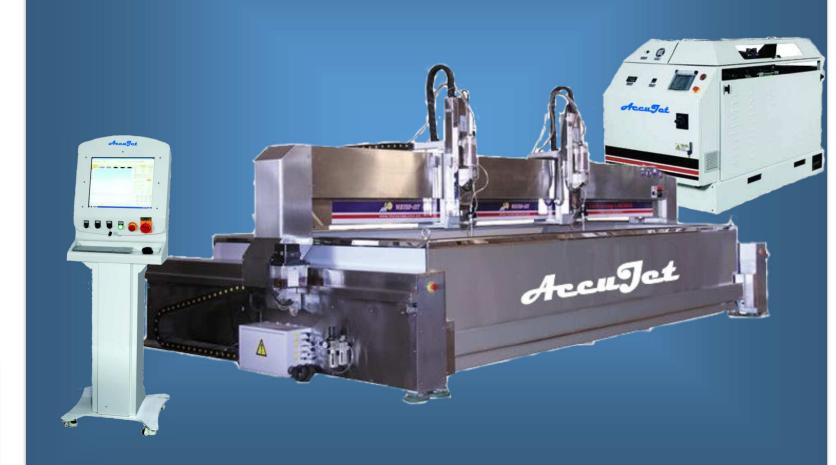

The New AccuJet Line of WaterJet Machines

The Gold Standard of WaterJet Cutting

- Affordable
 - » Precise
- Easy To Use
- Dependable


Three-Dimensional Cutting











Windows Based Controls







Abrasive Systems with Servo Flow Control







System Enclosures with Power Operated Doors





